


LEXION		8700 / 8700 TERRA TRAC	7700 / 7700 TERRA TRAC	7600 / 7600 TERRA TRAC
Threshing unit and primary separation				
APS SYNFLOW HYBRID		●	●	●
Threshing drum width	mm	1700	1420	1420
Threshing drum diameter	mm	755	755	755
Threshing drum speed	rpm	330-930	330-930	330-930
with reduction gear	rpm	170-460 / 330-930	170-460 / 330-930	170-460 / 330-930
Concave wrap angle	degrees	132	132	132
Main concave area	m ²	1.55	1.30	1.30
Rice threshing unit		○	○	○
Secondary separation				
ROTO PLUS high performance rotors	No.	2	2	2
Feed drum diameter	mm	600	600	600
Rotor length	mm	4200	4200	4200
Rotor diameter	mm	445	445	445
Rotor concaves	No.	6	5	5
Rotor speed	rpm	450-1250	370-1050	370-1050
Crop cleaning				
JET STREAM		●	●	●
Turbine fan		8-way	6-turbine	6-turbine
Fan adjustment, hydraulic		●	●	●
Dual ventilated step		●	●	●
4D cleaning system		○	○	○
Total sieve area	m ²	6.20	5.10	5.10
Returns display in CEBIS		○	○	○
GRAINMETER		○	○	○
Grain tank				
Capacity (as per ANSI/ASAE S312.2)	l	15000/18000	13500	12500
Unloading auger swivel angle	degrees	105	105	105
Unloading rate	l/s	130/180	130/180	110/130
QUANTIMETER yield meter		○	○	○

More height and reach for easy offloading.

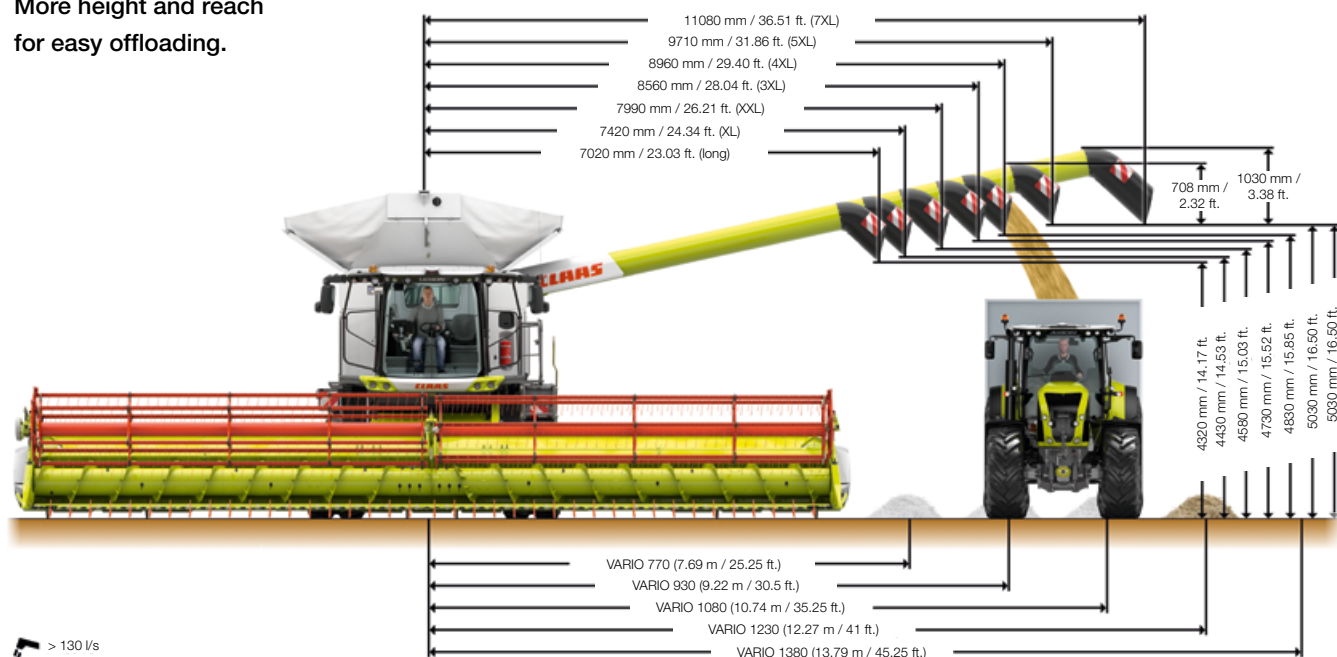

> 130 l/s

● Standard ○ Option □ Available – Not available

LEXION		8700 / 8700 TERRA TRAC	7700 / 7700 TERRA TRAC	7600 / 7600 TERRA TRAC
Chopper				
SPECIAL CUT straw chopper, knives	No.	108	72	72
STANDARD CUT straw chopper, knives	No.	64	52	52
Power spreader		○	○	○
Hydraulic changeover from cab (road travel, swathing, chopping)		●	●	●
Hydraulic adjustment of static knife and friction concave plate		○	○	○
Chaff spreader		○	○	○
Chaff fan with power spreader		○	○	○
Automatic discharge direction adjustment		○	○	○
Running gear				
TERRA TRAC crawler tracks with hydro-pneumatic suspension		○	○	○
POWER TRAC all-wheel drive		○	○	○
2-speed manual gearbox		●	●	●
40 km/h		○	○	○
Differential lock for wheeled machine		○	○	–
Car-like driving characteristics		●	●	●
Engine Stage V				
Manufacturer / Type			Perkins 2206 D	
Cylinders / displacement	No./l	6/12.5	6/12.5	6/12.5
Maximum output (ECE R 120)	kW/hp	420/571	385/524	339/461
Fuel consumption measurement		○	○	○
Fuel tank capacity	l	1150	1150	1150
DYNAMIC COOLING		●	●	●
DYNAMIC POWER		●	●	●
Data management				
TELEMATICS		●	●	●
Job management		○	○	○
Yield mapping		○	○	○
Remote Service		○	○	○
Operator assistance systems				
CRUISE PILOT		○	○	○
CEMOS AUTO THRESHING		○	○	○
CEMOS AUTO CLEANING		○	○	○
CEMOS AUTO SEPARATION		○	○	○
CEMOS AUTO CHOPPING		○	○	○
AUTO SLOPE		○	○	○
AUTO CROP FLOW		○	○	○
CEMOS DIALOG		○	○	○
GRAIN QUALITY CAMERA		○	○	○
Steering systems				
GPS PILOT, LASER PILOT, AUTO PILOT		○	○	○
Weights (can vary depending on equipment) without front attachment, straw chopper and chaff spreader, full fuel tank, full urea tank	kg	19700/ 22400 (TERRA TRAC)	18700/ 21400 (TERRA TRAC)	18700/ 21400 (TERRA TRAC)

As CLAAS continually develops its products to meet customers' requirements, all products are subject to change without notice. All descriptions and specifications in this brochure should be considered approximate and may include optional equipment that is not part of the standard specifications. This brochure is designed for worldwide use. Please consult your nearest CLAAS dealer and their price list for local specification details. Some protective panels may have been removed for photographic purposes in order to present the function clearly. To avoid hazards, never remove these protective panels yourself. Please refer to the relevant instructions in the operator's manual in this regard. All technical specifications relating to engines are based on the European emission regulation standards: Stage. Any reference to the Tier standards in this document is intended solely for information purposes and ease of understanding. It does not imply approval for regions in which emissions are regulated by Tier.

● Standard ○ Option □ Available – Not available

LEXION				8700 / 8700 TERRA TRAC	7700 / 7700 TERRA TRAC	7600 / 7600 TERRA TRAC
Tyres on the drive axle						
Tyre size			ø cat.	External width		
1250/50 R 32	m		2.05	5.15	4.87	–
VF 900/60 R 42 CFO	m		2.15	3.90	3.62	–
900/60 R 42 CHO	m		2.15	3.90	3.62	–
800/70 R 42 CHO	m		2.15	3.76	3.48	–
680/80 R 42 CHO	m		2.15	3.49	3.22	–
VF 900/60 R 38 CHO	m		2.05	3.90	3.62	3.62
900/60 R 38 CHO	m		2.05	3.90	3.62	3.62
IF 800/70 R 38 CFO	m		2.05	3.76	3.48	3.48
800/70 R 38 CHO	m		2.05	3.76	3.48	3.48
IF 680/80 R 38 CFO	m		2.05	3.49	3.22	3.22
680/80 R 38 CHO	m		2.05	3.49	3.22	3.22
900/60 R 32	m		1.95	3.90	3.62	3.62
IF 800/70 R 32 CFO	m		1.95	3.76	3.48	3.48
800/70 R 32	m		1.95	3.76	3.48	3.48
710/75 R 34	m		1.95	3.65	3.37	3.37
IF 680/85 R 32 CFO	m		1.95	3.49	3.28	3.35
TERRA TRAC 635 mm	m		–	3.49	3.29	3.29
TERRA TRAC 735 mm	m		–	3.79	3.49	3.49
TERRA TRAC 890 mm	m		–	3.99	3.79	3.79

LEXION				8700 / 8700 TERRA TRAC	7700 / 7700 TERRA TRAC	7600 / 7600 TERRA TRAC
Tyres on the steering axle						
Tyre size			ø cat.	External width		
710/60 R 30	m		1.65	3.89	3.69	3.69
VF 620/70 R 30	m		1.65	3.69	3.49	3.49
620/70 R 30	m		1.65	3.69	3.49	3.49
VF 520/85 R 30	m		1.65	3.49	3.29	3.29
500/85 R 30	m		1.65	3.47	3.27	3.27
VF620/70 R 26	m		1.50	–	3.49	3.49
750/65 R 26	m		1.60	–	3.74	3.74
600/65 R 28	m		1.50	–	3.69	3.49
500/85 R 24	m		1.50	–	3.48	3.28

Front attachments						
VARIO cutterbars			VARIO 1380 ¹ , VARIO 1230 ¹ , VARIO 1080, VARIO 930, VARIO 770, VARIO 680, VARIO 620, VARIO 560			
CERIO cutterbars			CERIO 930, CERIO 770, CERIO 680, CERIO 620, CERIO 560			
Rapeseed equipment			For all standard and VARIO cutterbars, not available for CERIO cutterbars			
Folding cutterbars			C 540, C 450			
SUNSPEED	rows		16, 12, 8			
MAXFLEX			MAXFLEX 930, MAXFLEX 770, MAXFLEX 620, MAXFLEX 560			
CONVIO FLEX			CONVIO FLEX 1380 ¹ , CONVIO FLEX 1230 ¹ , CONVIO FLEX 1080, CONVIO FLEX 930, CONVIO FLEX 770			
CONVIO			CONVIO 1380 ¹ , CONVIO 1230 ¹ , CONVIO 1080, CONVIO 930, CONVIO 770			
CORIO CONSPEED			1270 C, 1275 C, 880 FC, 890 C, 875 FC, 875 C, 870 FC, 870 C, 690 C, 680 FC, 675 FC, 675 C, 670 FC, 670 C			
CORIO			880 FC, 875 FC, 875 C, 870 FC, 870 C, 680 FC, 675 FC, 675 C, 670 FC, 670 C			
VARIO rice cutterbars			Available as HD version with rice harvesting accessory pack			
CERIO rice cutterbars			Available as HD version with rice harvesting accessory pack			
SWATH UP			SWATH UP 450			
Variable speed drive front attachment (electrohydraulic)	rpm		284-420			
Front attachment step drive	rpm		332, 420			
Instant cutterbar brake			○			

¹ Only for LEXION with TERRA TRAC